



2-seater bench with 4-legged aluminum injected base available in polished aluminum, white and black. Piping available in fabric to match upholstery on the bench, white, black or sand color.

0,57

19

1

Frame

4-legged aluminum injected base.

Seat

Solid beech structure with flame retardant polyurethane flexible foam with a density between 25 kg/m3 and 40 kg/m3.

Back

Solid beech structure with flame retardant polyurethane flexible foam with a density between 55 lb/ft3 and 88 lb/ft3 (25 kg/m3 and 40 kg/m3).

Arms

Solid beech wood covered with flexible flame retardant polyurethane foam with density between 25 kg/m3 and 40 kg/m3.

Other materials

Zinc-nickel electrolyte screws. Galvanized staples. Polyvinyl acetate glue.

Accesories

Felt glides.

Leather


Leather

L1 High grade cow leather

L3 Polished full grain leather

Fabrics	Fabrics / Telas				Faux Leather / Ecopiel
	1 Jacquard One Jacquard Three Sand Era Gravity Rivet Urban	3 Jacquard Four Medley Revive 1 Maglia Main Line Flax Loom Two	5 Silk Synergy Step Step Melange Messenger 5 Blazer Melange Nap Glow	8 Capture Fiord Tonus 4 Divina 3 Lopi	1 Valencia 2 Silvertex 4 Dolce 6 Ledger
	2 Jacquard Two	4 Jacquard 4 Special Hemp Nexus Oxygen Floyd Remix 2 Heritage Savane Loom Three Loom Four	6 Capture Fiord Tonus 4 Divina 3 Lopi	9 Divina MD Divina Melange 3 Hallingdal 65 Steelcut Trio 3	
			7 Canvas 2 Rime		

Aluminum
 finish

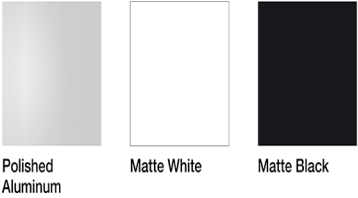

Resistance
 and
 Quality

Indoor Air Quality-Advantage Gold

ISO 9001

UNE-EN 16139

Fireproof

BKZ 5.2

BS 5852 Part 2 Crib 5

California Technical Bulletin 117

UNE-EN 1021-1 & 2

UNI 9175 (class 1 IM)

Sustainability

ISO 14001

ISO 14001

level® 1 certified to ANSI/BIFMA e3 Standard